


# LUBRICATION

# GROUP XV

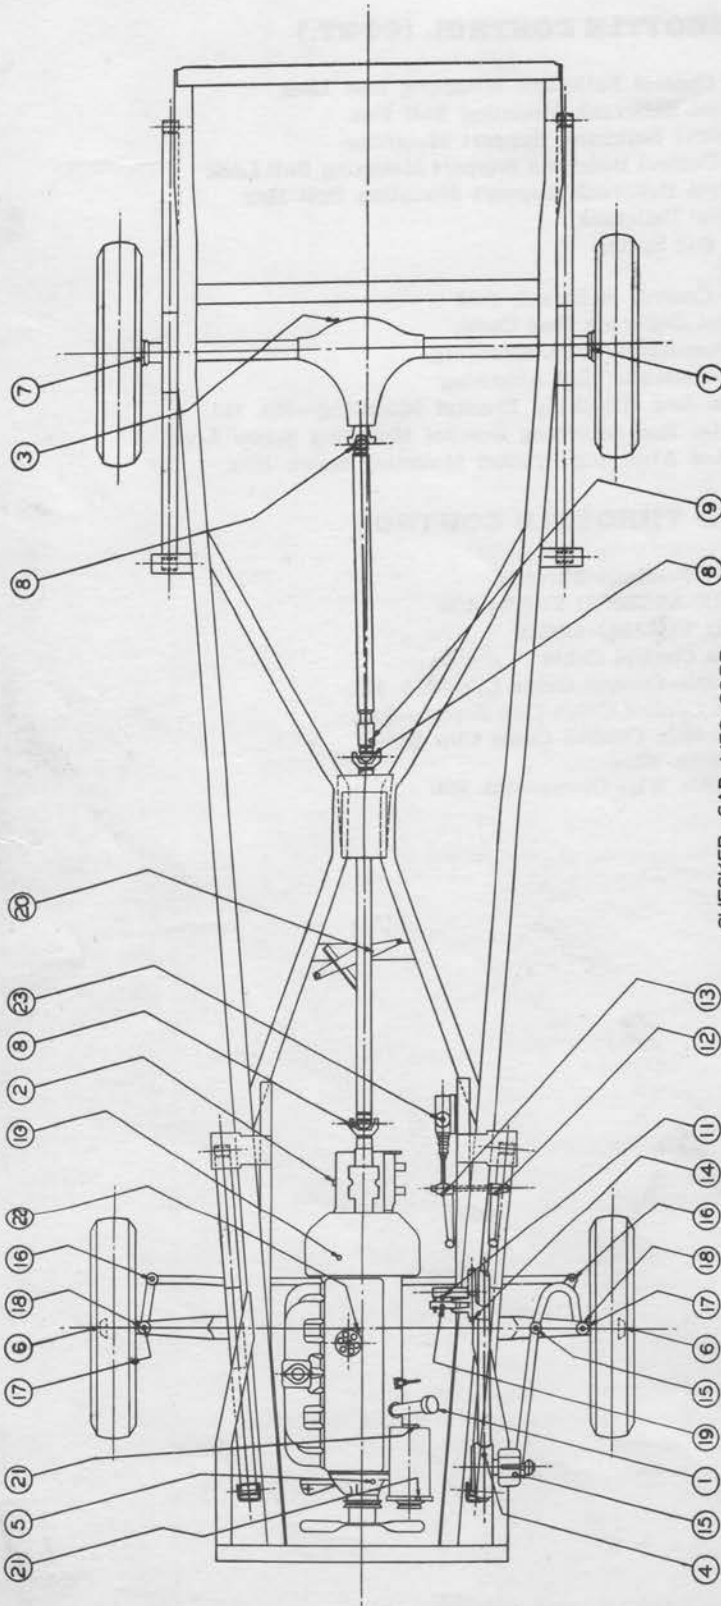

CHECKER CAB MFG. CORP.  
KALAMAZOO, MICH.  
MODEL A-4

## LUBRICATION CHART

NO.	UNIT	NO. OF POINTS	LUBRICANT	TO BE CHECKED	PERIODIC CHECK PERIODS	REMARKS
1	ENGINE	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
2	TRANSMISSION	1	SAE 90 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
3	DIFFERENTIAL	1	SAE 90 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
4	MASTER CYLINDER	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
5	SLIP SHOE	2	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
6	WHEEL BEARING - FRONT	2	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
7	WHEEL BEARING - REAR	2	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
8	WHEEL BEARING - REAR	2	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
9	SLIP SHOE - FRONT	2	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
10	SLIP SHOE - REAR	2	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
11	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
12	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
13	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
14	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
15	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
16	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
17	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
18	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
19	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
20	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
21	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
22	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY
23	CLUTCH	1	SAE 30 MOTOR OIL	TO ADJUSTER	ON FULL OIL	ON DAY AND NIGHT WHEN DIRTY

\* THIS SHOULD BE A NEAR APPROXIMATE CALCULATION OF SPACING POINTS. GREASE WITH A MELTING POINT OF 300 DEGREES F.